

Vestax

PDX ARM REST

ARM REST - HOLDER OF TONE ARM

OWNER'S MANUAL

Head Office
1-18-6 Wakabayashi, Tokyo 154-0023 Japan
Web: <http://www.vestax.com/>

Vestax Global Support
csg@vestax.jp

Vestax Europe Support
info@vestax.parts




READ BEFORE

Thank you for purchasing this Vestax Original Spare Part for PDX-2000 / PDX-3000 Series turntables. Please read this install manual carefully with the PDX-2000 / PDX-3000 owner's manual before installation.

ORIGINAL ACCESSORIES

Please check all items listed below are included.
Use the device service manual for installation

- 1 Remove the damaged PDX ARM REST from the holder shank (part of the front panel of the turntable).
- 2 Clean the hole for inserting the PDX ARM REST thoroughly.
- 3 Insert into hole the PDX ARM REST so that its center points of open arm tangentially to the center of the turntable platter (see fig. A).
- 4 You can use superglue to attach it, but only a very small amount! (only 1 small drop).
- 5 Make sure the PDX ARM REST is seated in the correct position (fig. A).
- 6 Some variant of PDX ARM REST may require a small adjustment of the shank diameter in some models of Vestax PDX turntables - reduction of diameter using a fine file (fig. A)

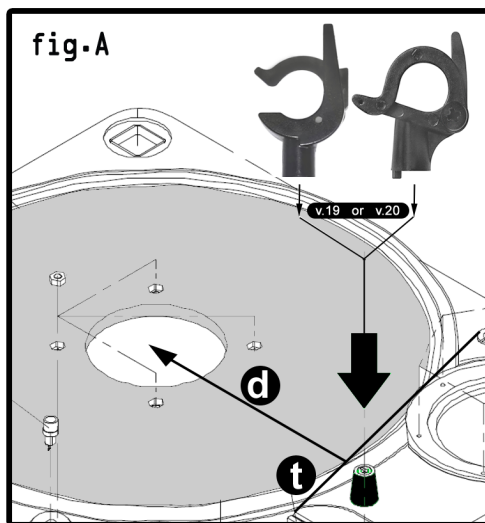

NOTE

Whenever you handle or transport the Vestax turntable, remember to secure the tonearm against movement via PDX ARM REST holder. This will prevent damage to the tonearm or cartridge.

The Vestax Corporation manufacturer reserves the right to make technical modifications without prior notice.

ISBN 45 SVC 2001 version 2